


Forma 5

TECHNICAL FEATURES

ZAMA



For anti-electrostatic solutions, please ask us the conditions.

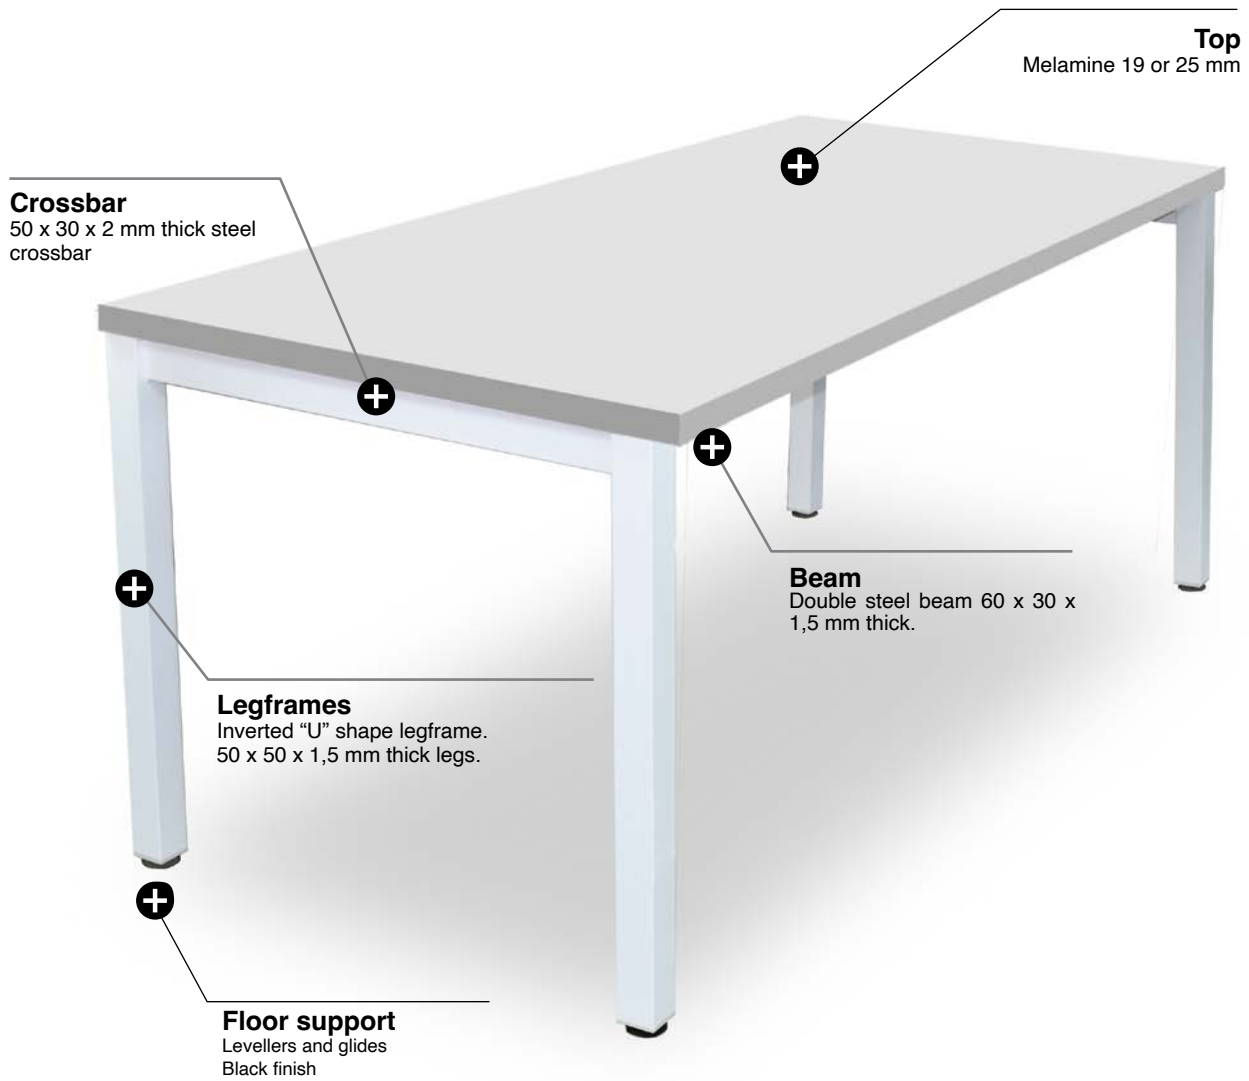

Top
Melamine 19 or 25 mm


Crossbar
50 x 30 x 2 mm thick steel
crossbar

Leg frames
Double leg frame for bench.
Rversed "U" shape steel leg.
50 x 50 x 1,5 mm thick legs.

Beam
4 Steel beams 60 x 30 x 1,5
mm thick.

Floor support
Levellers and glides
Black finish

ELEMENT DESCRIPTION

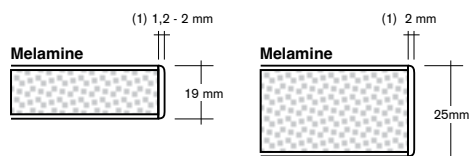

EDGE WIDTH	19 mm BOARD	25 mm BOARD
2 mm ⁽¹⁾	Desk top	Desk top

DESK TOPS

Melamine: 19 or 25 mm thick melamine particle board. 2 mm thick thermofused edges around the perimeter. Wide range of finishes. The quality requirements for the board are made according to the UNE-EN 312 legal terms, corresponding to P2 board. The average 25 mm thick board density is 595/m³. The average 19 mm thick board density is 630 kg/m³.



LEG FRAMES

Square leg steel tube 50x50x1.5 mm thick with crossbar 50 x 30 x 2 mm. 100 micron epoxy powder paint. 60 x 30 x 1,5 mm beams as top support. Floor support with levellers to keep the desk surface straight.


This program includes three types of leg frames: simple (for single desks), double (for bench desks) and add-on leg frames (for bench desks). The last type provides longitudinal growth for add-on desks and, as it is shorter than the bench side where it is installed, it facilitates the distribution of workstations.



DETAILS



Black glides and levellers.

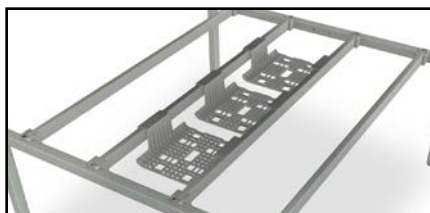

Cable wire tray.



Melamine, glass, upholstered desk screens.

DESK SCREENS



MELAMINE DESK SCREEN

19 mm thick particle board with 2 mm thermofused edges around the perimeter. Fixed to the framework with specific fittings.



GLASS DESK SCREEN

6 mm (3 + 3 mm) laminated glass with inner butyral sheet. Polished edges and rounded corners. Fixed to the framework by specific fittings.



UPHOLSTERED DESK SCREEN

16 mm thick particle board base with both sides upholstered, fixed to the framework by specific fittings. Sewings at laterals.



UPHOLSTERED ACOUSTIC DESK SCREEN

16 mm thick particleboard base covered with a 5 mm thick foam cover with 60 kg/m³ density and upholstered on both sides. Double perimeter seam. Fixing to the structure of the desk by specific fittings.

FABRIC METERS

	Desks 180 width	Desks 160 width	Desks 140 width	Desks 120 width
Front screen	1,9 m	1,7 m	1,5 m	1,3 m

Fabric meters for 1 unit. For other units, consult if possible the fabric optimization.

ELEMENT DESCRIPTION



MELAMINE MODESTY PANELS


19 mm thick particles board with 1,2 mm thick thermofused edges in its whole perimeter fixed to the framework with specific fittings hidden under the desk.




METAL MODESTY PANELS

Drilled steel modesty panel with powder epoxy paint finished 220°C polymerized (1,5 mm thick) and engraved texture. Hanging from the front beam.


COMPATIBILITIES WITH CABLE MANAGEMENT



Modesty panels non compatibles with cable management. Hidden beam.



Modesty panels compatibles with cable management. Trays and beams from the desk front. Modesty panel is placed behind them.



Modesty panels compatibles with cable management. Trays and beams from the desk front. Modesty panel is placed in front of them.

ACCESSORIES FOR DESK SURFACE



SQUARE DESK GROMMETS

ABS tap of 94 x 94 mm and polished finish. Polypropylene piece Ø 80 mm inner. Height 25 mm (2 mm over top).



ALUMINIUM TOP ACCESS

Aluminium part overall dimensions 367 x 127 x 33 mm. Extruded tap aluminium 348 x 89 mm and 4 mm average thickness. Aluminium injection inner piece average thickness 2.5 mm.



POLYAMIDE TOP ACCESS


Polyamide part outer dimensions are 245 mm x 125 mm x h: 25 mm. The inner has a gap of 225mm x 90mm for the cable management. Set of two pieces made of polyamide with 10% glass fiber and 20% microspheres.

HORIZONTAL CABLE DRIVING



METAL TRANSVERSALE CABLE TRAY

1,5 mm thick blank folded sheet tray. Dimensions 463 x 136 x 124 mm. Folds for fixing between beams.




POLYPROPYLENE CABLE TRAY

Variable thick polypropylene tray. Overall dimensions 365 x 165 x 150 mm. Fixation to top directly by screws.




REMOVABLE METAL TRANSVERSALE CABLE

1,2 mm thick folded sheet metal tray, with final piece and fastening polyamide clamp to beam. Sheet dimensions: 920/720 x 121.9 x 98.3 mm. Overall dimensions: 1000/800 x 195.4 x 133.4 mm.



POLYPROPYLENE WIRE CABLE TRAY

Variable thick polypropylene tray. Overall dimensions 472 x 360 x 114 mm. Fixation to beams by folds in the mold. It is possible to screw it to the top.



REMOVABLE WIRE CABLE TRAYS

Electrowelded wire tray Ø 5 mm rod. Fix to the tap by metal plates.



METAL CABLE TRAY TO SERVICE POWER

Metal cable tray to service power outlet, made of steel sheet, 1,2 mm thickness and 300 mm in length. Possibility of setting a power block. Fixing in the desk top with wooden screws. outlet



REMOVABLE METAL DOUBLE CABLE TRAY


1,2 mm thick folded sheet tray. Dimensions 1200/1000 x 338 mm. Polyamide pieces for subjection to beam. Overall dimensions of the set: 1200/1000 x 489.3 x 142.5 mm.

ELEMENT DESCRIPTION

VERTICAL CABLE DRIVING



METAL CABLE PILLAR
1,5 mm thick metal pillar. Section 71 x 70 mm, base 160 x 160 mm. Overall height 572.5 mm.



F25, ZAMA AND ZAMA NEXT CABLE MANAGEMENT PILLAR
1 mm thick folded sheet metal column in "C" shape. 51 x 41,5 mm and 584 mm height. Fixation to leg by pressure.



CABLE SPINE FOR ELECTRIFICATION
Spiral thermoplastic material, anchored to the top by screws and to the ground with a pedestal base. Silver gray finish.

ADDITIONAL ACCESSORIES



ADJUSTABLE CPU CABINET
Support folded metal sheet, 2 mm thick. Adjustable height and width to suit different dimensions. Screwed to desk top. Flexible polyurethane protections to prevent vibration and to ensure an optimal fit.



4 WAY POWER BLOCK
16A 250V sockets for 3 x 1.5 mm² power cable.



POWER CABLE AND EXTENSION CABLE
3 x 1,5 mm² cable 250V 16A with grounding.



3 WAY POWER BLOCK WITH 2X RJ45 DATA
16A 250V sockets for 3 x 1.5 mm² power cable.

CONFIGURATIONS AND DIMENSIONS

ZAMA - DESKS CLÁSSIC

	RECTANGULAR DESK	A x B	180 x 80 160 x 80 140 x 80 120 x 80 100 x 80 180 x 60 160 x 60 140 x 60 120 x 60 100 x 60
	ADD-ON RECTANGULAR DESK - LEG FRAMES SUPPORT	A x B	180 x 80 160 x 80 140 x 80 120 x 80 100 x 80 180 x 60 160 x 60 140 x 60 120 x 60 100 x 60

TOP 19 mm h: 74 cm TOP 25 mm h: 74,6 cm

ZAMA - RETURN DESKS

	RETURN DESK AVAILABLE FOR DESK AND BENCH DESK	A x B	100 x 60 80 x 60
--	---	-------	---------------------


TOP 19 mm h: 74 cm TOP 25 mm h: 74,6 cm

ZAMA - BENCH DESKS

	BENCH DESK	A x B/b1	180 x 162/80 160 x 162/80 140 x 162/80 120 x 162/80 180 x 122/60 160 x 122/60 140 x 122/60 120 x 122/60
--	------------	----------	--

	ADD-ON BENCH DESK - LEG FRAMES SUPPORT	A x B/b1	180 x 162/80 160 x 162/80 140 x 162/80 120 x 162/80 180 x 122/60 160 x 122/60 140 x 122/60 120 x 122/60
--	--	----------	--

TOP 19 mm h: 74 cm TOP 25 mm h: 74,6 cm



Life Cycle Analysis
Zama Programme



RAW MATERIALS		
Raw Material	Kg	%
Steel	14,88 Kg	39%
Plastic	0,87 Kg	2%
Wood	22,50 Kg	59%

% Recycled material= 57%
 % Recyclable materials= 99%

Ecodesign

Results reached during the life cycle stages



MATERIALS

Wood

70% of the wood material is recycled, has PEFC/FSC and complies within the E1 standard.

Steel

15%-99% recycled material.

Plastic


30%-40% recycled material.

Paintings

Podwer painting without COV emissions

Packings

100% recyclable with inks with no solvents.



PRODUCTION

Raw materials use optimization
Board, upholstery and steel tubes cut.

Renewable energies use
reducing the CO2 emissions. (Photovoltaic pannels)

Energy saving measures
in all production process

COV global emission reduction
of the production processes by 70%.

Podwer painting
ecovery of 93% of the non deposited painting

Glue removal from the upholstery

The facilities
have an internal sewage for liquid waste.

Green points
at the factory

100% waste recycling
at production process ans dangerous waste special treatment.



TRANSPORT

Cardboard use opmitization
of the packings

Cardboard and packing materials use reduction

Flat packings and small bulks
to optimize the space.

Solid waste compacter
which reduces transport and emissions.

Light volumes and weights

Transport fleet renewal
reducing by 28% the fuel consumption.

Suppliers area reduction
Local market power and less pollution at transport.



USE

Easy maintenance and cleaning
without solvents.

Forma 5 guarantee

The highest quality
for materials to provide a 10 year average life of the product.

Useful life optimization
of the product due to a standarized and modular design.

The boards
with no E1 particle emission.



END LIFE

Easy unpacking
for the recyclability or compound reuse.

Piece standarization
for the use.

Recycled materials used for products (% recyclability):
Wood is 100% recyclable.
Steel is 100% recyclable.

With no air or water pollution
while removing waste.

Returnable, recyclable and reusable packing

Product recyclability 99%

MAINTENANCE AND CLEANING GUIDE

MELAMINE PIECES

Rub the dirty spots with a wet cloth with PH neutral soap.

PLASTIC PIECES

Rub the dirty spots with a wet cloth with PH neutral soap.

METAL PIECES

- 1 Rub the dirty spots with a wet cloth with PH neutral soap.
- 2 Polished aluminium pieces can have their polish bak by covering and rubbing them with a dry cottom cloth.

GLASS PIECES

Rub the dirty spots with a wet cloth with PH neutral soap.

Do not use abrasive products in any case.

LEGAL TERMS

CERTIFICADOS

Forma 5 certifies that ZAMA programme has passed tests conducted in the laboratory of internal Quality Control and TECNALIA Research Technology Center, obtaining "satisfactory" results in the following tests:

UNE-EN 527-1:2011 norm. Office furniture. Desks. Part 1: Dimensions.

UNE-EN 527-2:2002 norm. Office furniture. Desks. Part 2: Security mechanism requirements.

UNE-EN 527-2:2003 norm. Office furniture. Desks. Part 3: Testing methods to determine the stability and mechanic resistance of the structure.

Developed by FORMA 5 R&D